

HSF Pb RoHS

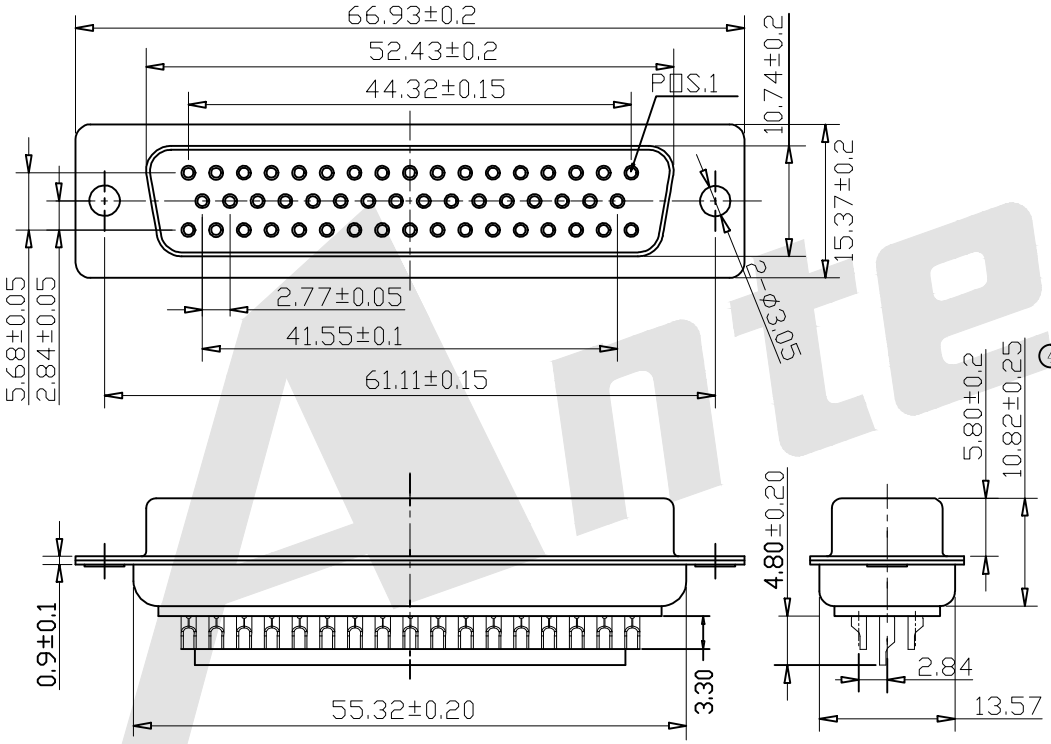

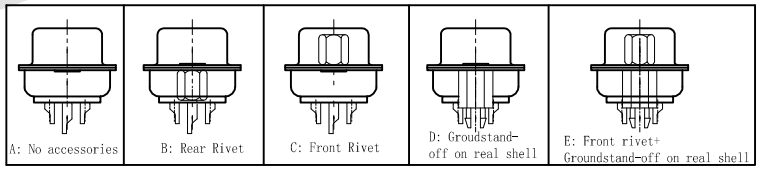

Material:
Housing: Temperature Thermoplastics,PBT+G.F UL 94V-0
Contact: Brass or Bronze
Shell: 0.35T Steel Nickel Plating All Area

Electical Characteristics:
Current Rating: 5A
Contact Resistance: 20 milliohms Max
Withstanding Voltage: 500V AC For 1 Minute
Insulation Resistance: 1000 Megohms Min
Operating Temperature: -55° C to +105° C

Ordering Code:

DB02 - F - 50 - A - 0 - B - S
① ② ③ ④ ⑤ ⑥ ⑦

① Three Row Straight DIP(Pitch:2.77mm)

② Contact Type:
F:Female

③ Contact NO.:
50=50pin

④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
D: Groudstand-off on real shell
E: Front rivet+Groundstand-off on real shell

⑤ Accessories:
0: Non Accessories
A: Zinc alloy 4.8mm Nickel
A1:Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
B1:Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
C1:Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
D1:Copper screw 5.8mm Nickel

⑥ Color Code:
W:White L:Blue
B:Black G:Grey

⑦ Contact Plating
S: Selective Gold
S1:Selective 3u" Gold
S2:Selective 5u" Gold
S3:Selective 10u"Gold
S4:Selective 15u" Gold
S5:Selective30u" Gold
G0: Gold flash
G1: 3u" Gold over
G2: 5u" Gold over
G3: 10u" Gold over
G4: 15u" Gold over
G5: 30u" Gold over

REV	DESCRIPTION	DATE

Unless Otherwise specified tolerance
X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 27/03/2019
CHECK BobYang	DATE 27/03/2019

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
D-SUB Femaile Three Row 50Pin
(Pitch:2.77mm)Solder Type(stamped Pin)

DRAWING NO: DB02-F50XXXX
PRODUCT NO: DB02-F50XXXX

Antenk